




# SINGLE SERIES

Single-head automatic embroidery machine

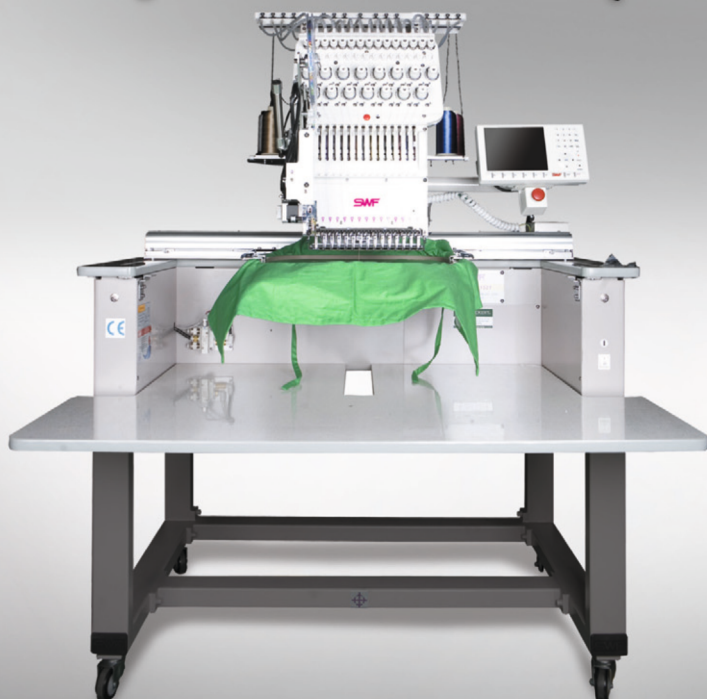

**SMF**  
Wise selection  
of embroidery machine



Macchine da ricamo, laser e strass dal 1990

[www.ilpuntosrl.eu](http://www.ilpuntosrl.eu) ♦ [info@ilpuntoswf.com](mailto:info@ilpuntoswf.com)

Sede e Showroom: Via Carrara Finizia, 73 / 71

76011 Bisceglie (BT) ♦ Tel./Fax : +39 080 39 58 258

Seguici  
Follow us



SWF / E - T 15 01

Series: SWF / E - T  
M/C Type: 15  
No. of Heads: 01  
No. of Colors: 01

Specifications				
Embroidering Range [X x Y]mm	Normal	520 x 360		
	Inner Space	Wide Cap Frame	360 x 75	
		Semi-wide Cap Frame	180 x 83	
		Tubular Frame	412 x 357	
Machine Size[L x W x H]mm		1,191 x 1,113 x 1,408		
Speed	Max. 1,200 rpm	Operation Box	Standard : Color LCD Screen	
Stitching Length	0.1 ~ 12.7 mm	Hook	Standard Hook	
Motor	Main	BLDC Motor x 1	Memory Capacity	Standard 4,000,000 stitches* Possible to change by additional functions
	X-Y	Pulse Motor x 2	Memory Media	USB Memory Stick
Electricity	1-Phase Free Voltage[100 ~ 240V] / [50/60Hz]		Safety Device	Standard : Emergency Stop, Error Code Message
Power Consumption	500 W	Optional Device	SQ30/SQ31D, SQ35, Boring, Cording	
Bobbin Winder	Standard		Cap Frame[Semi/Wide]	
Upper Thread Holding Unit	Option			

SWF / E - U 12 01

Series: SWF / E - U  
M/C Type: 12  
No. of Heads: 01  
No. of Colors: 01

Specifications				
Embroidering Range [X x Y]mm	Normal	520 x 450		
	Inner Space	Wide Cap Frame	360 x 75	
		Semi-wide Cap Frame	180 x 83	
		Tubular Frame	419 x 439	
Machine Size[L x W x H]mm		1,385 x 725 x 1,609		
Speed	Max. 1,200 rpm	Lubrication System	Semi-auto Lubrication System	
Stitching Length	0.1 ~ 12.7 mm	Operation Box	Standard : Color LCD Screen	
Motor	Main	Servo Motor x 1	Hook	Standard Hook
	X-Y	Pulse Motor x 2	Memory Capacity	Standard 4,000,000 stitches* Possible to change by additional functions
Electricity	1-Phase Free Voltage[100 ~ 240V] / [50/60Hz]		Memory Media	USB Memory Stick
Power Consumption	500 W	Safety Device	Standard : Emergency Stop, Error Code Message	
Bobbin Winder	Standard	Optional Device	SQ30/SQ31D, SQ35, Boring, Cording	
Upper Thread Holding Unit	Option		Cap Frame[Semi/Wide]	

SWF / E - T 12 01 C

Series: SWF / E - T  
M/C Type: 12  
No. of Heads: 01  
No. of Colors: C

Specifications				
Embroidering Range [X x Y]mm	Normal	460 x 300		
	Inner Space	Wide Cap Frame	360 x 75	
		Semi-wide Cap Frame	180 x 83	
		Tubular Frame	412 x 270	
Machine Size[L x W x H]mm		730.3 x 727.2 x 853.8		
Machine Size[L x W x H]mm (Table Stand)		730.3 x 727.2 x 1540.8		
Speed	Max. 1,200 rpm	Operation Box	Standard : Color LCD Screen	
Stitching Length	0.1 ~ 12.7 mm	Hook	Standard Hook	
Motor	Main	BLDC Motor x 1	Memory Capacity	Standard 4,000,000 stitches* Possible to change by additional functions
	X-Y	Pulse Motor x 2	Memory Media	USB Memory Stick
Electricity	1-Phase Free Voltage[100 ~ 240V] / [50/60Hz]		Safety Device	Standard : Emergency Stop, Error Code Message
Power Consumption	500 W	Optional Device	Boring, Cap Frame[Semi/Wide]	
Bobbin Winder	Standard			

Division of Model		Emb. Spac[mm]				Machine Size[mm]			
Model	Color	Head	Normal	Tubular	Wide Cap Frame	Semi Cap Frame	Length	Width	Height
E-T1201	12	1	520 x 360	412 x 357	360 x 75	180 x 83	1,191	1,113	1,408
E-T1501	15	1	520 x 360	412 x 357	360 x 75	180 x 83	1,191	1,113	1,408
E-U1201	12	1	520 x 450	419 x 439	360 x 75	180 x 83	1,385	725	1,609
E-U1501	15	1	520 x 450	419 x 439	360 x 75	180 x 83	1,385	725	1,609
E-T901C	9	1	460 x 300	412 x 270	360 x 75	180 x 83	730.3	727.2	1540.8
E-T1201C	12	1	460 x 300	412 x 270	360 x 75	180 x 83	730.3	727.2	1540.8
E-T1501C	15	1	460 x 300	412 x 270	360 x 75	180 x 83	730.3	727.2	1540.8
E-T901CS	9	1	460 x 300	412 x 270	360 x 75	180 x 83	730.3	727.2	1540.8
E-T1201CS	12	1	460 x 300	412 x 270	360 x 75	180 x 83	730.3	727.2	1540.8
E-T1501CS	15	1	460 x 300	412 x 270	360 x 75	180 x 83	730.3	727.2	1540.8